


# HOW TO ORDER



## BALL VALVES & MANIFOLDS

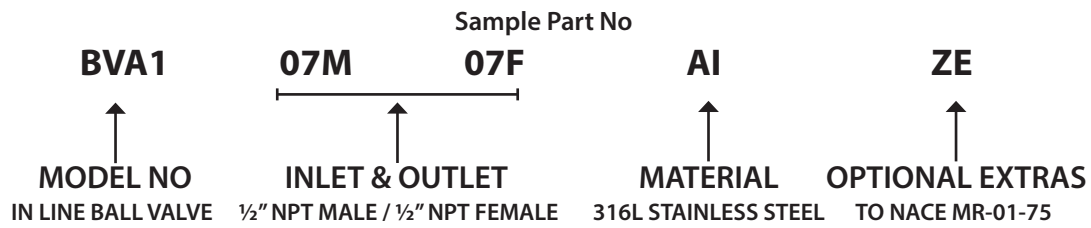

| Inlet & Outlet  |
|---|
| M = Male F = Female Thread                                |
| 02M or F = G $\frac{1}{8}$ "B or G $\frac{1}{8}$ "(BSPP)  |
| 03M or F = $\frac{1}{4}$ " NPT                            |
| 04M or F = G $\frac{1}{4}$ "B or G $\frac{1}{4}$ " (BSPP) |
| 05M or F = $\frac{3}{8}$ " NPT                            |
| 06M or F = G $\frac{3}{8}$ "B or G $\frac{3}{8}$ "(BSPP)  |
| 07M or F = $\frac{1}{2}$ " NPT                            |
| 08M or F = G $\frac{1}{2}$ "B or G $\frac{1}{2}$ " (BSPP) |
| 09M or F = $\frac{3}{4}$ " NPT                            |
| 10M or F = G $\frac{3}{4}$ "B or G $\frac{3}{4}$ " (BSPP) |
| 11M or F = 1" NPT   |
| 12M or F = G1B or G1 (BSPP)                               |
| 13M or F = R $\frac{1}{4}$ " or Rc $\frac{1}{4}$ " (BSPT) |
| 14M or F = R $\frac{3}{8}$ " or Rc $\frac{3}{8}$ "(BSPT)  |
| 15M or F = R $\frac{1}{2}$ " or Rc $\frac{1}{2}$ " (BSPT) |
| 16M or F = R $\frac{3}{4}$ " or Rc $\frac{3}{4}$ " (BSPT) |
| 17M or F = R1 or Rc1 (BSPT)                               |
| 18M or F = R $\frac{1}{8}$ " or Rc $\frac{1}{8}$ "(BSPT)  |
|   |
| <b>Key</b>  |
| GxB = Parallel Male Class B                               |
| G = Parallel Female                                       |
| R = Taper Male  |
| Rc = Taper Female   |

| Material  |
|---|
| AI = 316L Stainless Steel (UNS S31600 / S31603)             |
| MO = MONEL <sup>®</sup> 400 (UNS N04400)                    |
| HA = HASTELLOY <sup>®</sup> C-276 <sup>®</sup> (UNS N10276) |
| IL = INCONEL <sup>®</sup> 625 (UNS N06625)                  |
| IN = INCOLOY <sup>®</sup> 825 (UNS N08825)                  |
| TI = TITANIUM Gr.2 (UNS R50400)                             |
| DU = DUPLEX (UNS S31803)                                    |
| SD = SUPER DUPLEX (UNS S32760)                              |
| HC = HASTELLOY <sup>®</sup> C-22 (UNS N06022)               |
| SA = SUPER AUSTENITIC ST.ST 6%Mo (UNS S31254)               |
| Note: Other materials available on request.                 |

| Optional Extras   |
|---|
| ZA = Rated 700 bar / 10,000 psi (Dimensions available on request) |
| ZB = Panel Mount  |
| ZC = Lockable Handle Without Padlock                              |
| ZD = Lockable Handle With Padlock                                 |
| ZE = To Nace MR-01-75 (ISO 15156 Latest Edition)                  |
| ZF = Fire Safe (Dimensions available on request)                  |
| ZG = Surface Mount Tapped Holes                                   |
| ZH = Degreased to Oxygen Standard                                 |
| ZJ = Complete with Tamperproof Spanner Flat Handle                |
| ZK = NORSOK M630 (Latest edition)                                 |
| ZL = Rated 207 bar / 3,000 psi                                    |

Note: Please add any additional optional extras in alphabetical order and consider that not all options are available on all models.

### STEWART-BUCHANAN GAUGES LTD

Sales Office & Manufacturing Facility - 7 Garrell Road, Burnside Industrial Estate, Kilsyth, Glasgow G65 9JX, SCOTLAND  
 Tel: +44 (0)1236 821533 | Fax: +44 (0)1236 824090 | E-mail: sales@stewarts-group.com | Web: stewarts-group.com