

Models-521,522,523,524. Stainless Steel Case & Brass Internals

Case

AISI 304 Stainless Steel
Bezel Stainless Steel (Bayonet type).
Weatherproof Construction

Socket + Element

Brass, Phosphor Bronze / Beryllium Copper

Thread

1/8", 1/4", 3/8", 1/2" NPT, BSP, BSPT

Movement

Brass

Dial

White Aluminium (Black Printing)

Pointer

Black Aluminium

Window

Sheet Glass

Standard Size

63, 100, 150mm (2.1/2", 4", 6")

Accuracy class

1%

Scale Range

Vacuum - 1,500 bar (20,000 psi)

Ordering information

State:- Pressure gauge model
/ Nominal size / Scale range
/ Size and location of connection
/ Optional extras reqd.

Optional extras

AISI 316 Stainless steel case.
White plastic dial (Black Printing).
Micro adjustable pointer / Black Finish.
Other pressure connections (including high pressure).
Laminated safety glass / Perspex window.
Customer logo.
Liquid filling.
Vibragauge®
Snubbagauge®
Further options: on request




Model - 522

We manufacture a wide range of instruments to customer's special requirements
We shall be pleased to discuss and advise on your specifications.

Specifications and dimensions given in this leaflet represent the state of engineering at the time of printing.
Engineering modifications may take place without prior notice.

Models-521,522,523,524. Stainless Steel Case & Brass Internals

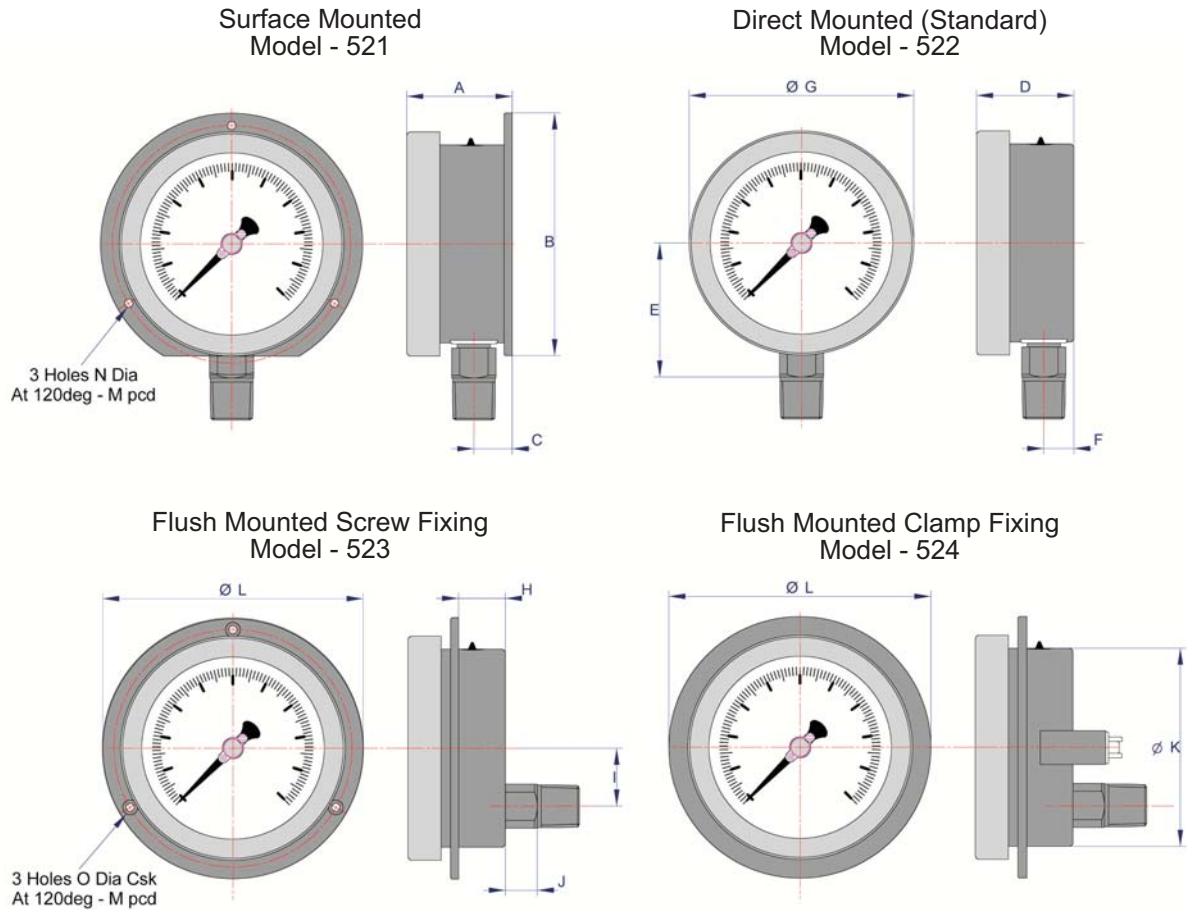

| Dimensions Diameter | A | B | C | D | E | F | G | H | I | J | K | L | M | N | O | Panel Cut-out |
|------------------------|------|------|------|------|----|-----|------|------|----|----|-----|-----|-----|-----|-----|------------------|
| 63 | 39 | 78.5 | 12.5 | 31 | 42 | 9.5 | 68.5 | 21.5 | 18 | 10 | 62 | 85 | 75 | 3.5 | 3.8 | 66 |
| 100 | 50.5 | 121 | 17 | 48.5 | 67 | 15 | 112 | 24.5 | 32 | 18 | 99 | 132 | 118 | 6.0 | 6.0 | 106 |
| 150 | 50.5 | 174 | 17 | 48.5 | 93 | 15 | 162 | 24.5 | 32 | 18 | 148 | 185 | 168 | 5.8 | 5.8 | 153 |