


MONOSEAL

View Page-2 for Dimensions

MONOSEAL

Monoseal gives compactability and weight saving.
 Materials: 316 St/St-Monel etc.
 Has trace code, and body with material certificates available for all wetted parts on request.
 OSY - Outside Screw and Yoke feature available.

HOW TO ORDER MONOSEAL

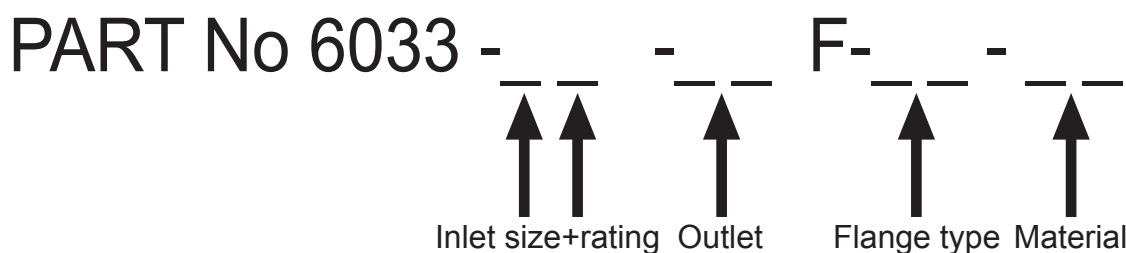

Inlet Codes

Outlet Codes

Matl Codes


SIZE		RATING		
1=	1/2"	A=150 lbs	03=1/4"NPT	AI =AISI 313 S/S
2=	3/4"	B=300 lbs	05=3/8"NPT	MO =MONEL
3=	1"	C=600 lbs	07=1/2"NPT	HA =HASTELLOY
4=	1.1/2"	D=900 lbs	04=1/4"BSPP	IN =INCOLOY 825
5=	2"	E=1500 lbs	06=3/8"BSPP	
6=	3"	F=2500 lbs	08=1/2"BSPP	FLANGE TYPE
			13=1/4"BSPTaper	RF =Raised Face
			14=3/8"BSPTaper	RTJ =Ring Type Joint
			15=1/2"BSPTaper	OSY =Outside Screw & Yoke

Add **AL** at end of Part No when NACE MR-01-75 is reqd.


STEWART-BUCHANAN GAUGES LTD

Sales Office & Manufacturing Facility,
 Burnside Industrial Estate, Kilsyth, Glasgow, G65 9JX, SCOTLAND
 Tel:- +44 (0)1236 821533
 Fax:- +44 (0)1236 824090
 E-Mail:- sales@stewarts-group.com
 Web Site:- www.stewarts-group.com

Flanges Below 2" x 150 lbs. RF

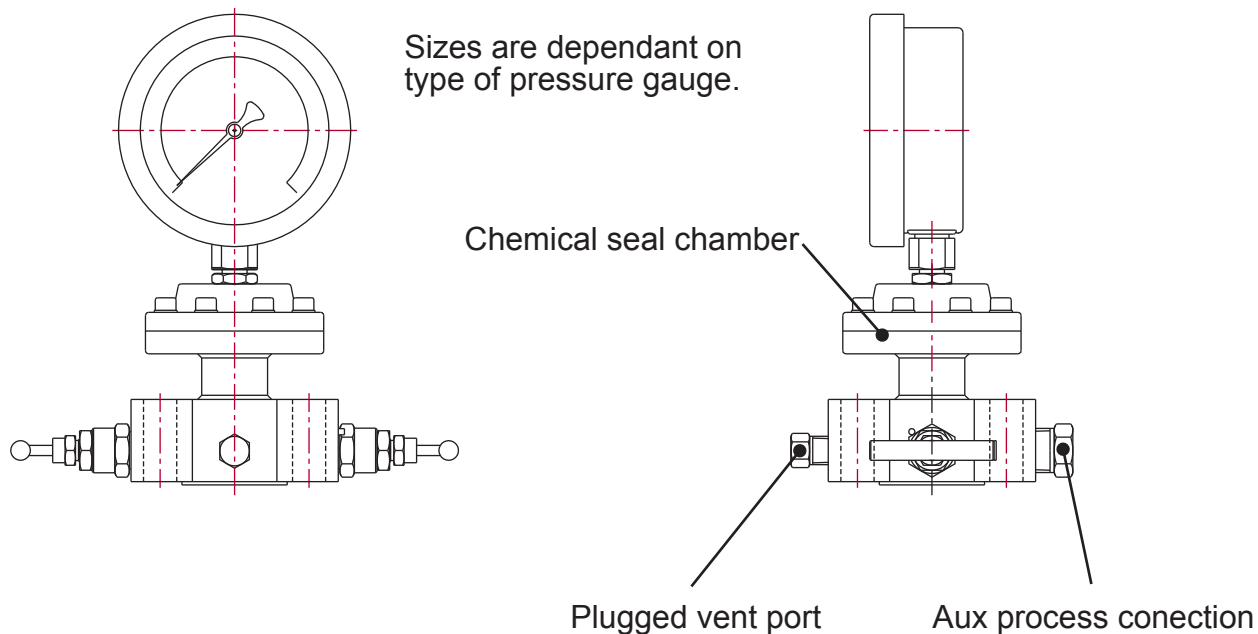

Flanges 2" x 150 lbs. RF & Above

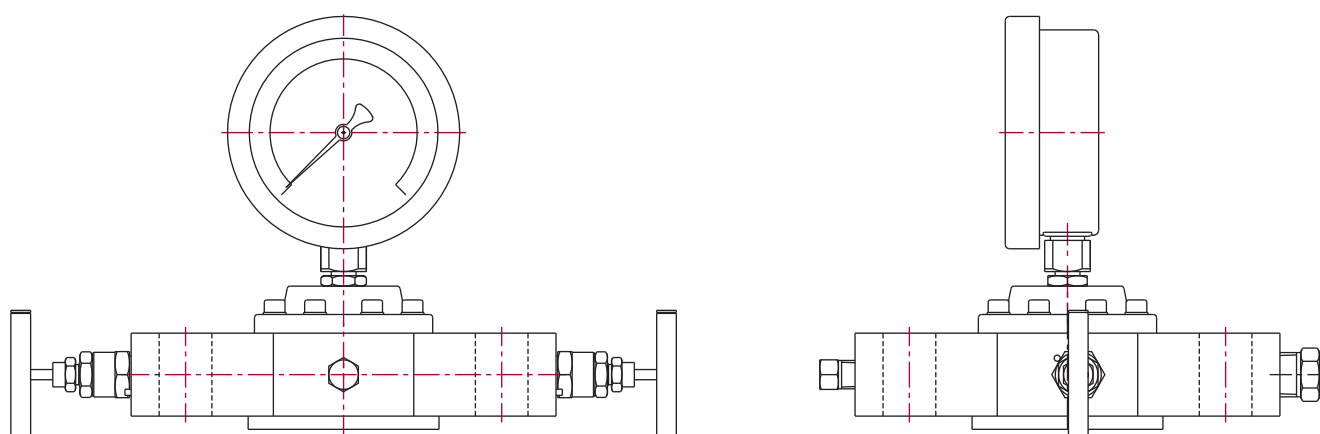

Gauge scale range should not exceed flange rating.

Pressure gauge dial size, model and specification can be selected from Chemical Seal Gauge data sheet.

STEWART-BUCHANAN GAUGES LTD

Sales Office & Manufacturing Facility,
Burnside Industrial Estate, Kilsyth, Glasgow, G65 9JX, SCOTLAND
Tel:- +44 (0)1236 821533
Fax:- +44 (0)1236 824090
E-Mail:- sales@stewarts-group.com
Web Site:- www.stewarts-group.com