


- Monoseal gives compactability and weight saving.
- Materials: 316 St/St-Monel etc.
- Has trace code, and body with material certificates available for all wetted parts on request.
- OSY - Outside Screw and Yoke feature available.

## How To Order

PART No = **6033**

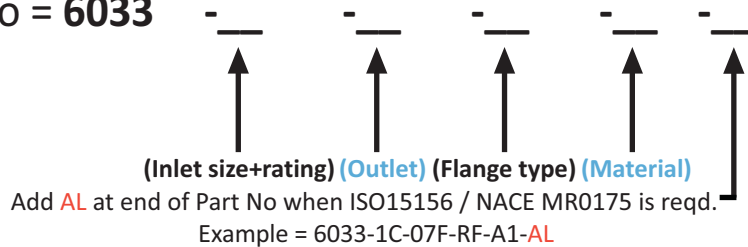


Inlet Size	Rating	Outlet Codes
<b>1</b> = 1/2" (DN15)	<b>A</b> = 150 CLASS	<b>03F</b> = 1/4" NPT
<b>2</b> = 3/4" (DN20)	<b>B</b> = 300 CLASS	<b>05F</b> = 3/8" NPT
<b>3</b> = 1" (DN25)	<b>C</b> = 600 CLASS	<b>07F</b> = 1/2" NPT
<b>4</b> = 1.5" (DN40)	<b>D</b> = 900 CLASS	<b>04F</b> = 1/4" BSPP
<b>5</b> = 2" (DN50)	<b>E</b> = 1500 CLASS	<b>06F</b> = 3/8" BSPP
<b>6</b> = 2.5" (DN65)	<b>F</b> = 2500 CLASS	<b>08F</b> = 1/2" BSPP
<b>7</b> = 3" (DN80)	<b>G</b> = PN2.5 Bar	<b>13F</b> = 1/4" BSPTaper
<b>8</b> = 4" (DN100)	<b>H</b> = PN6 Bar	<b>14F</b> = 3/8" BSPTaper
	<b>J</b> = PN10 Bar	<b>15F</b> = 1/2" BSPTaper
	<b>K</b> = PN16 Bar	
	<b>L</b> = PN25 Bar	
	<b>M</b> = PN40 Bar	
	<b>N</b> = PN63 Bar	

Flange type	Material Codes
<b>RF</b> = Raised Face	<b>AI</b> = AISI 316 S/S
<b>RTJ</b> = Ring Type Joint	<b>MO</b> = MONEL
	<b>HA</b> = HASTELLOY C276
	<b>IN</b> = INCOLOY 825
	<b>TI</b> = TITANIUM
	<b>HC</b> = HASTELLOY C22
	<b>IL</b> = INCONEL 625


[View Page-2 for Dimensions Details](#)

Safety, Quality, Reliability

**Flanges Below 2" x 150 lbs. RF**

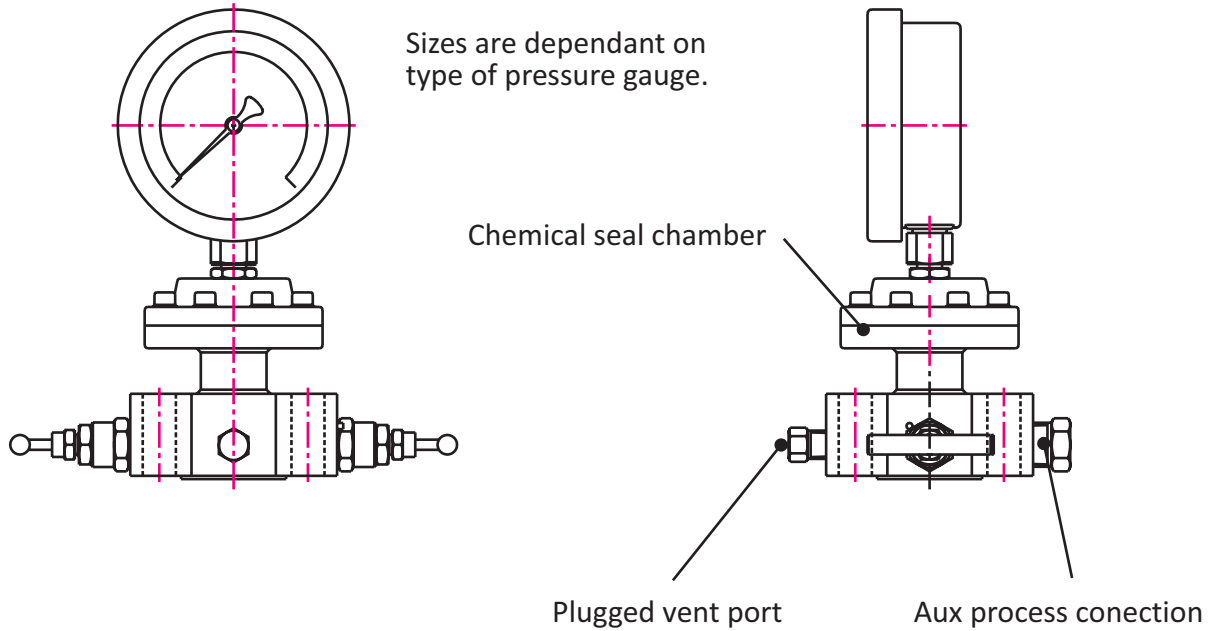

**Flanges Above 2" x 150 lbs. RF**

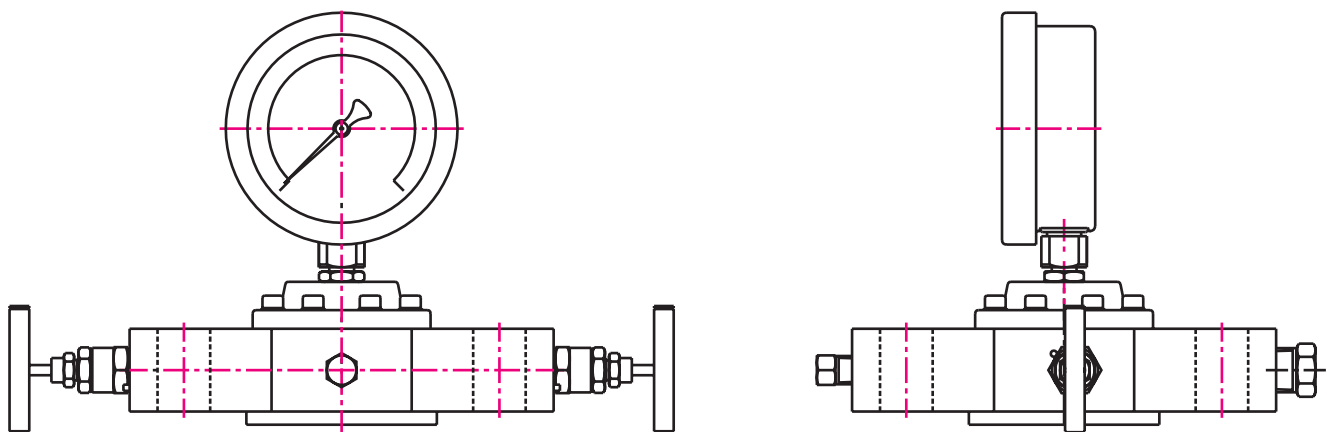

Gauge scale range should not exceed flange rating.

Pressure gauge dial size, model and specification can be selected from Chemical Seal Gauge data sheet.