MODEL - BVJ1

3 WAY BOTTOM ENTRY DIVERTION VALVE WITH "L" PORTED BALL VALVE 180° OPERATION 413 bar (6000 psi)







APPLICATION


An excellent choice for diverting flow applications. Recommended for use in oil, gas and petrochemical applications for essential long-term performance Also available in a range of other materials and options (See HOW TO ORDER Data Sheet).



WEIGHT = 1.6 kg

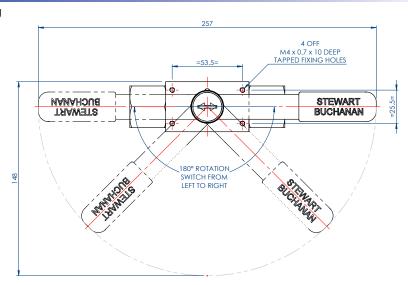

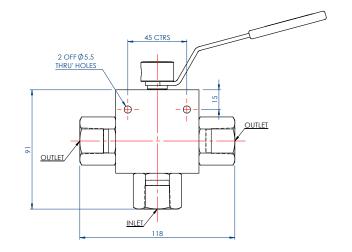





Tel: +44 (0)1236 821533 | Fax: +44 (0)1236 824090 | E-mail: sales@stewarts-group.com | Web: stewarts-group.com

